


# Transistor

## NPN Transistors C945

### ■ Features

- Collector current:  $I_c=0.15A$
- Low noise
- Complementary to A733

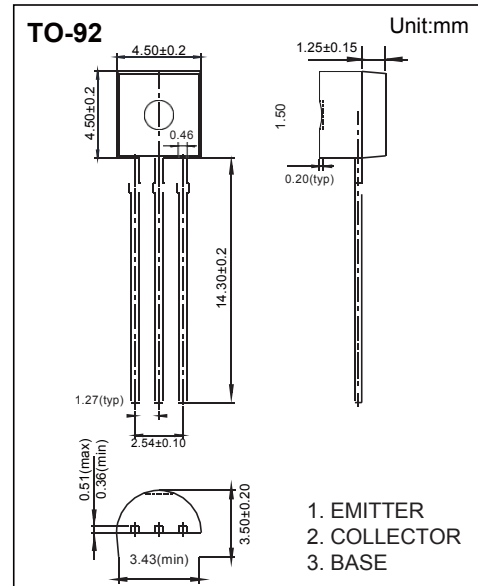

### ■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	$V_{CB0}$	60	V
Collector - Emitter Voltage	$V_{CE0}$	50	
Emitter - Base Voltage	$V_{EB0}$	5	
Collector Current - Continuous	$I_c$	0.15	A
Collector Power Dissipation	$P_c$	400	mW
Junction Temperature	$T_j$	125	°C
Storage Temperature	$T_{stg}$	-55 to 125	

# Transistor

## NPN Transistors C945

### ■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collecto- base breakdown voltage	V <sub>CB0</sub>	I <sub>C</sub> = 1 mA, I <sub>E</sub> =0	60			V
Collector- emitter breakdown voltage	V <sub>CEO</sub>	I <sub>C</sub> = 0.1 mA, I <sub>B</sub> =0	50			
Emitter - base breakdown voltage	V <sub>EB0</sub>	I <sub>E</sub> = 100 μA, I <sub>C</sub> =0	5			
Collector cut-off current	I <sub>CBO</sub>	V <sub>CB</sub> = 60 V, I <sub>E</sub> =0			0.1	μA
Collector cut-off current	I <sub>CEO</sub>	V <sub>CE</sub> = 45 V, I <sub>B</sub> =0			0.1	
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> = 5 V, I <sub>C</sub> =0			0.1	
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> =100 mA, I <sub>B</sub> = 10mA			0.3	V
Base - emitter saturation voltage	V <sub>BE(sat)</sub>	I <sub>C</sub> =100 mA, I <sub>B</sub> = 10mA			1	
DC current gain	h <sub>FE(1)</sub>	V <sub>CE</sub> = 6V, I <sub>C</sub> = 1 mA	70		700	
	h <sub>FE(2)</sub>	V <sub>CE</sub> = 6V, I <sub>C</sub> = 0.1 mA	40			
Noise figure	NF	V <sub>CE</sub> =6V, I <sub>C</sub> =0.1mA R <sub>G</sub> =10kΩ, f=1MHz			10	dB
Collector output capacitance	C <sub>ob</sub>	V <sub>CB</sub> =10V, I <sub>E</sub> =0, f=1MHz			3	pF
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> = 6V, I <sub>C</sub> = 10mA, f=30MHz	200			MHz

### ■ Classification

Rank	O	Y	GR	BL
Range	70-140	120-240	200-400	350-700